

Battery Euronet 12V-26Ah


Main Features




Specifications

Model	NP26-12
Made in	Taiwan
Cells Per Unit	6
Voltage Per Unit	12
Capacity	26Ah @10hr-rate
Weight	Approx 8.0kg
Max. Discharge Current	300 A (5sec)
Internal Resistance	Approx. 8m Ω
Operating Temperature Range	Discharge: -20°C~50°C
	Charge: -20°C~50°C
	Storage: -20°C~50°C
Normal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	13.50 to 13.80V DC/unit Average at 25°C
Max. Charging Current	7.8 A
Equalization and Cycle service	14.70 to 15.00V DC/unit Average at 25°C
Self Discharge	The batteries can be stored for more than 6 months at 25°C. Please charge batteries before using. For high temperature, the time interval will be shorter.
Terminal	T3/T10
Container Material	ABS (UL94-HB) Flammability resistance of UL94-V0 is available on request.
Dimension	175×166×125


نمودار دشارژ

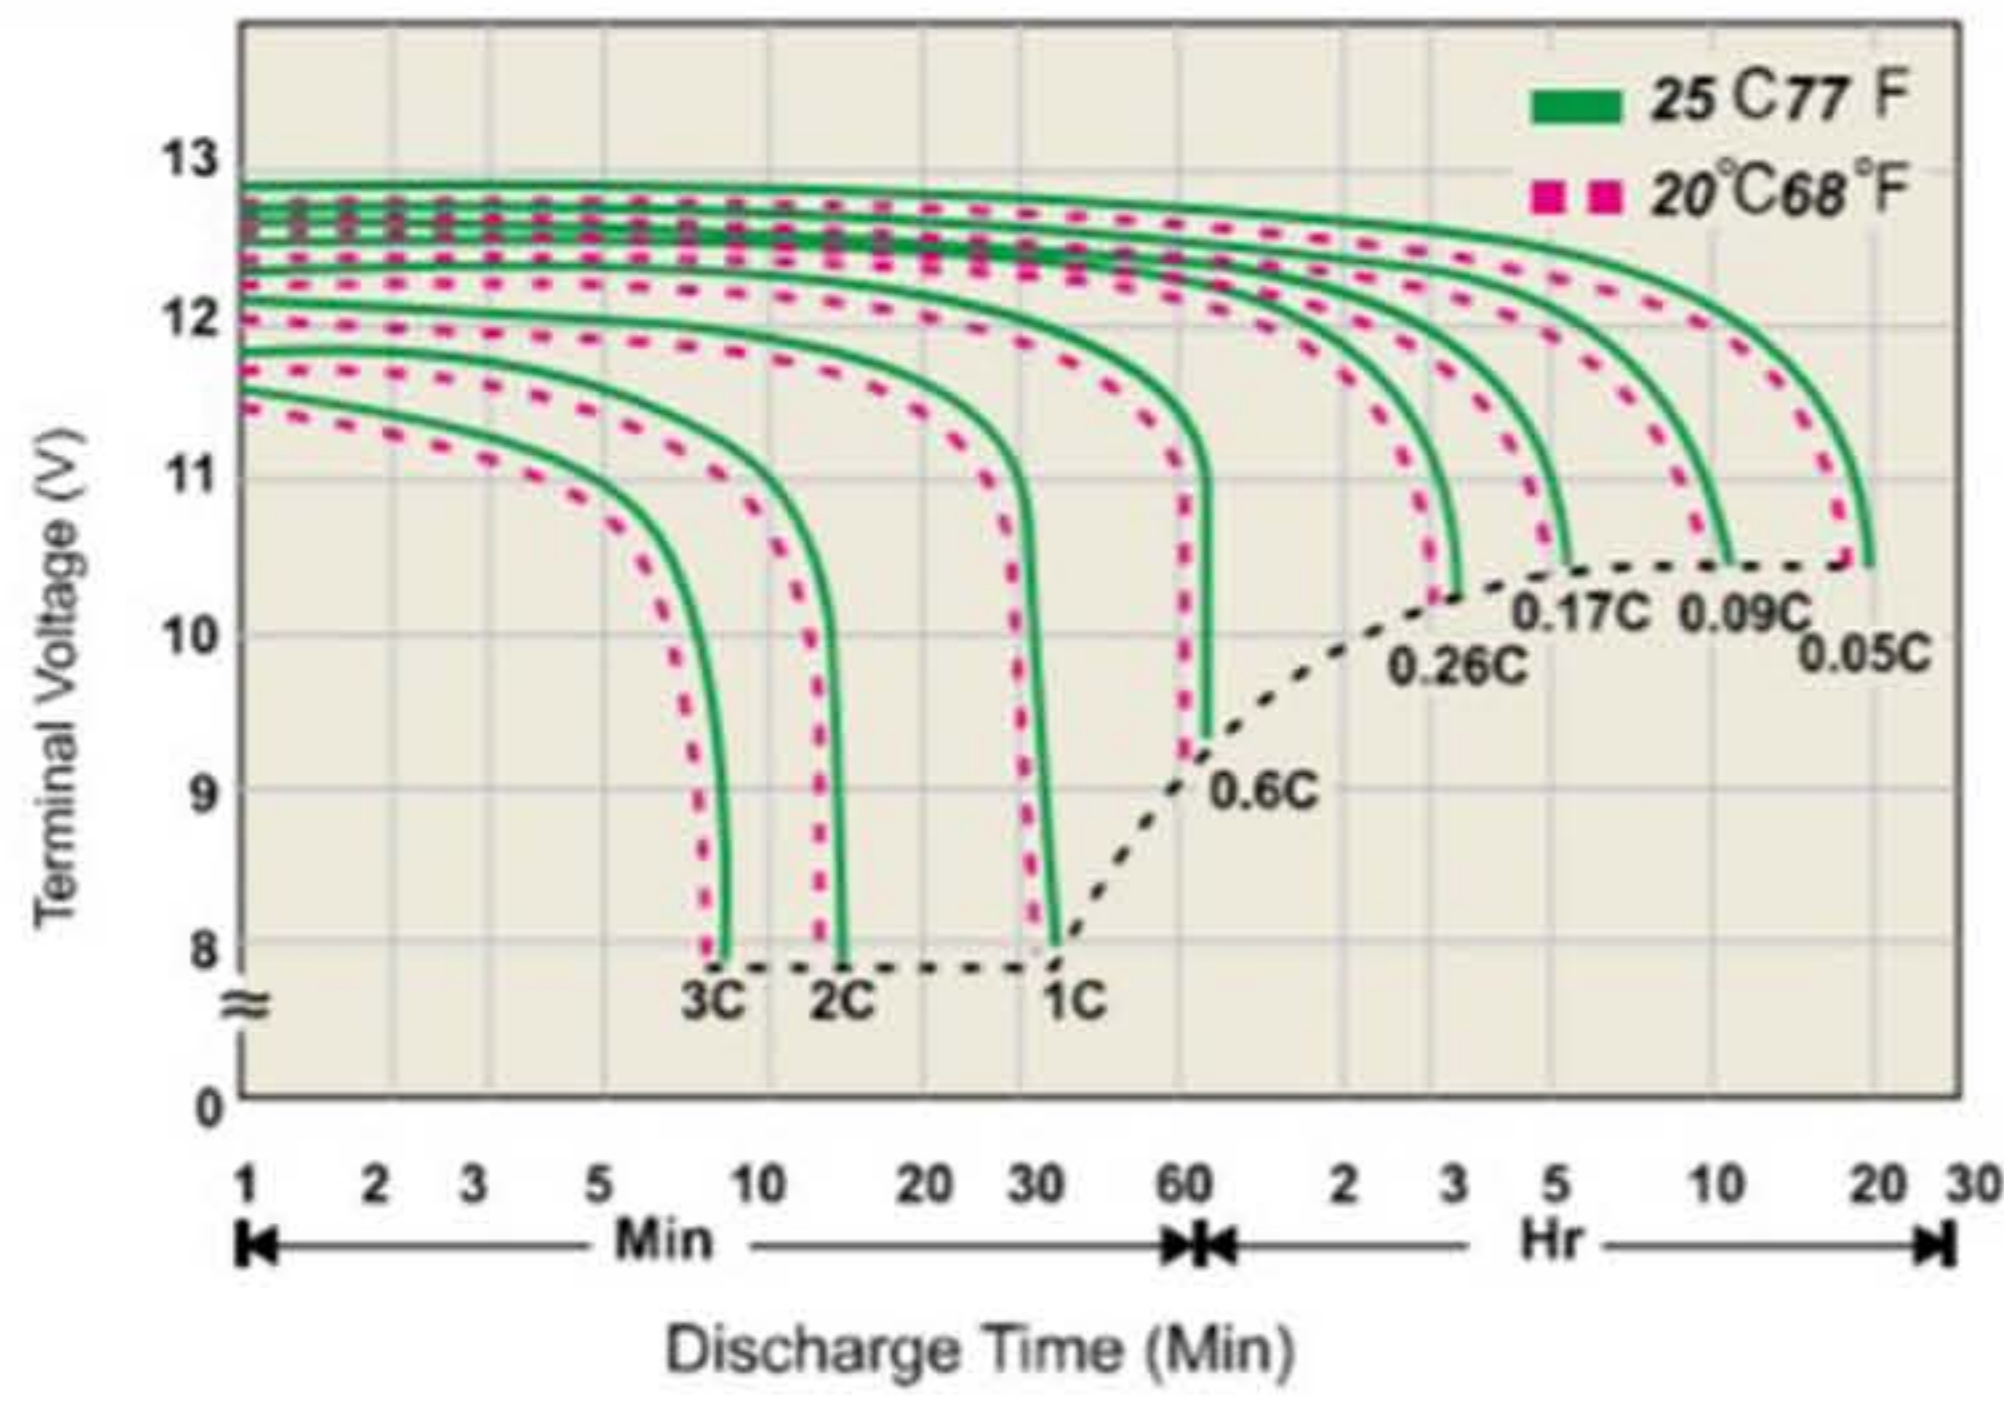


نمودار مشخصه حفظ ظرفیت

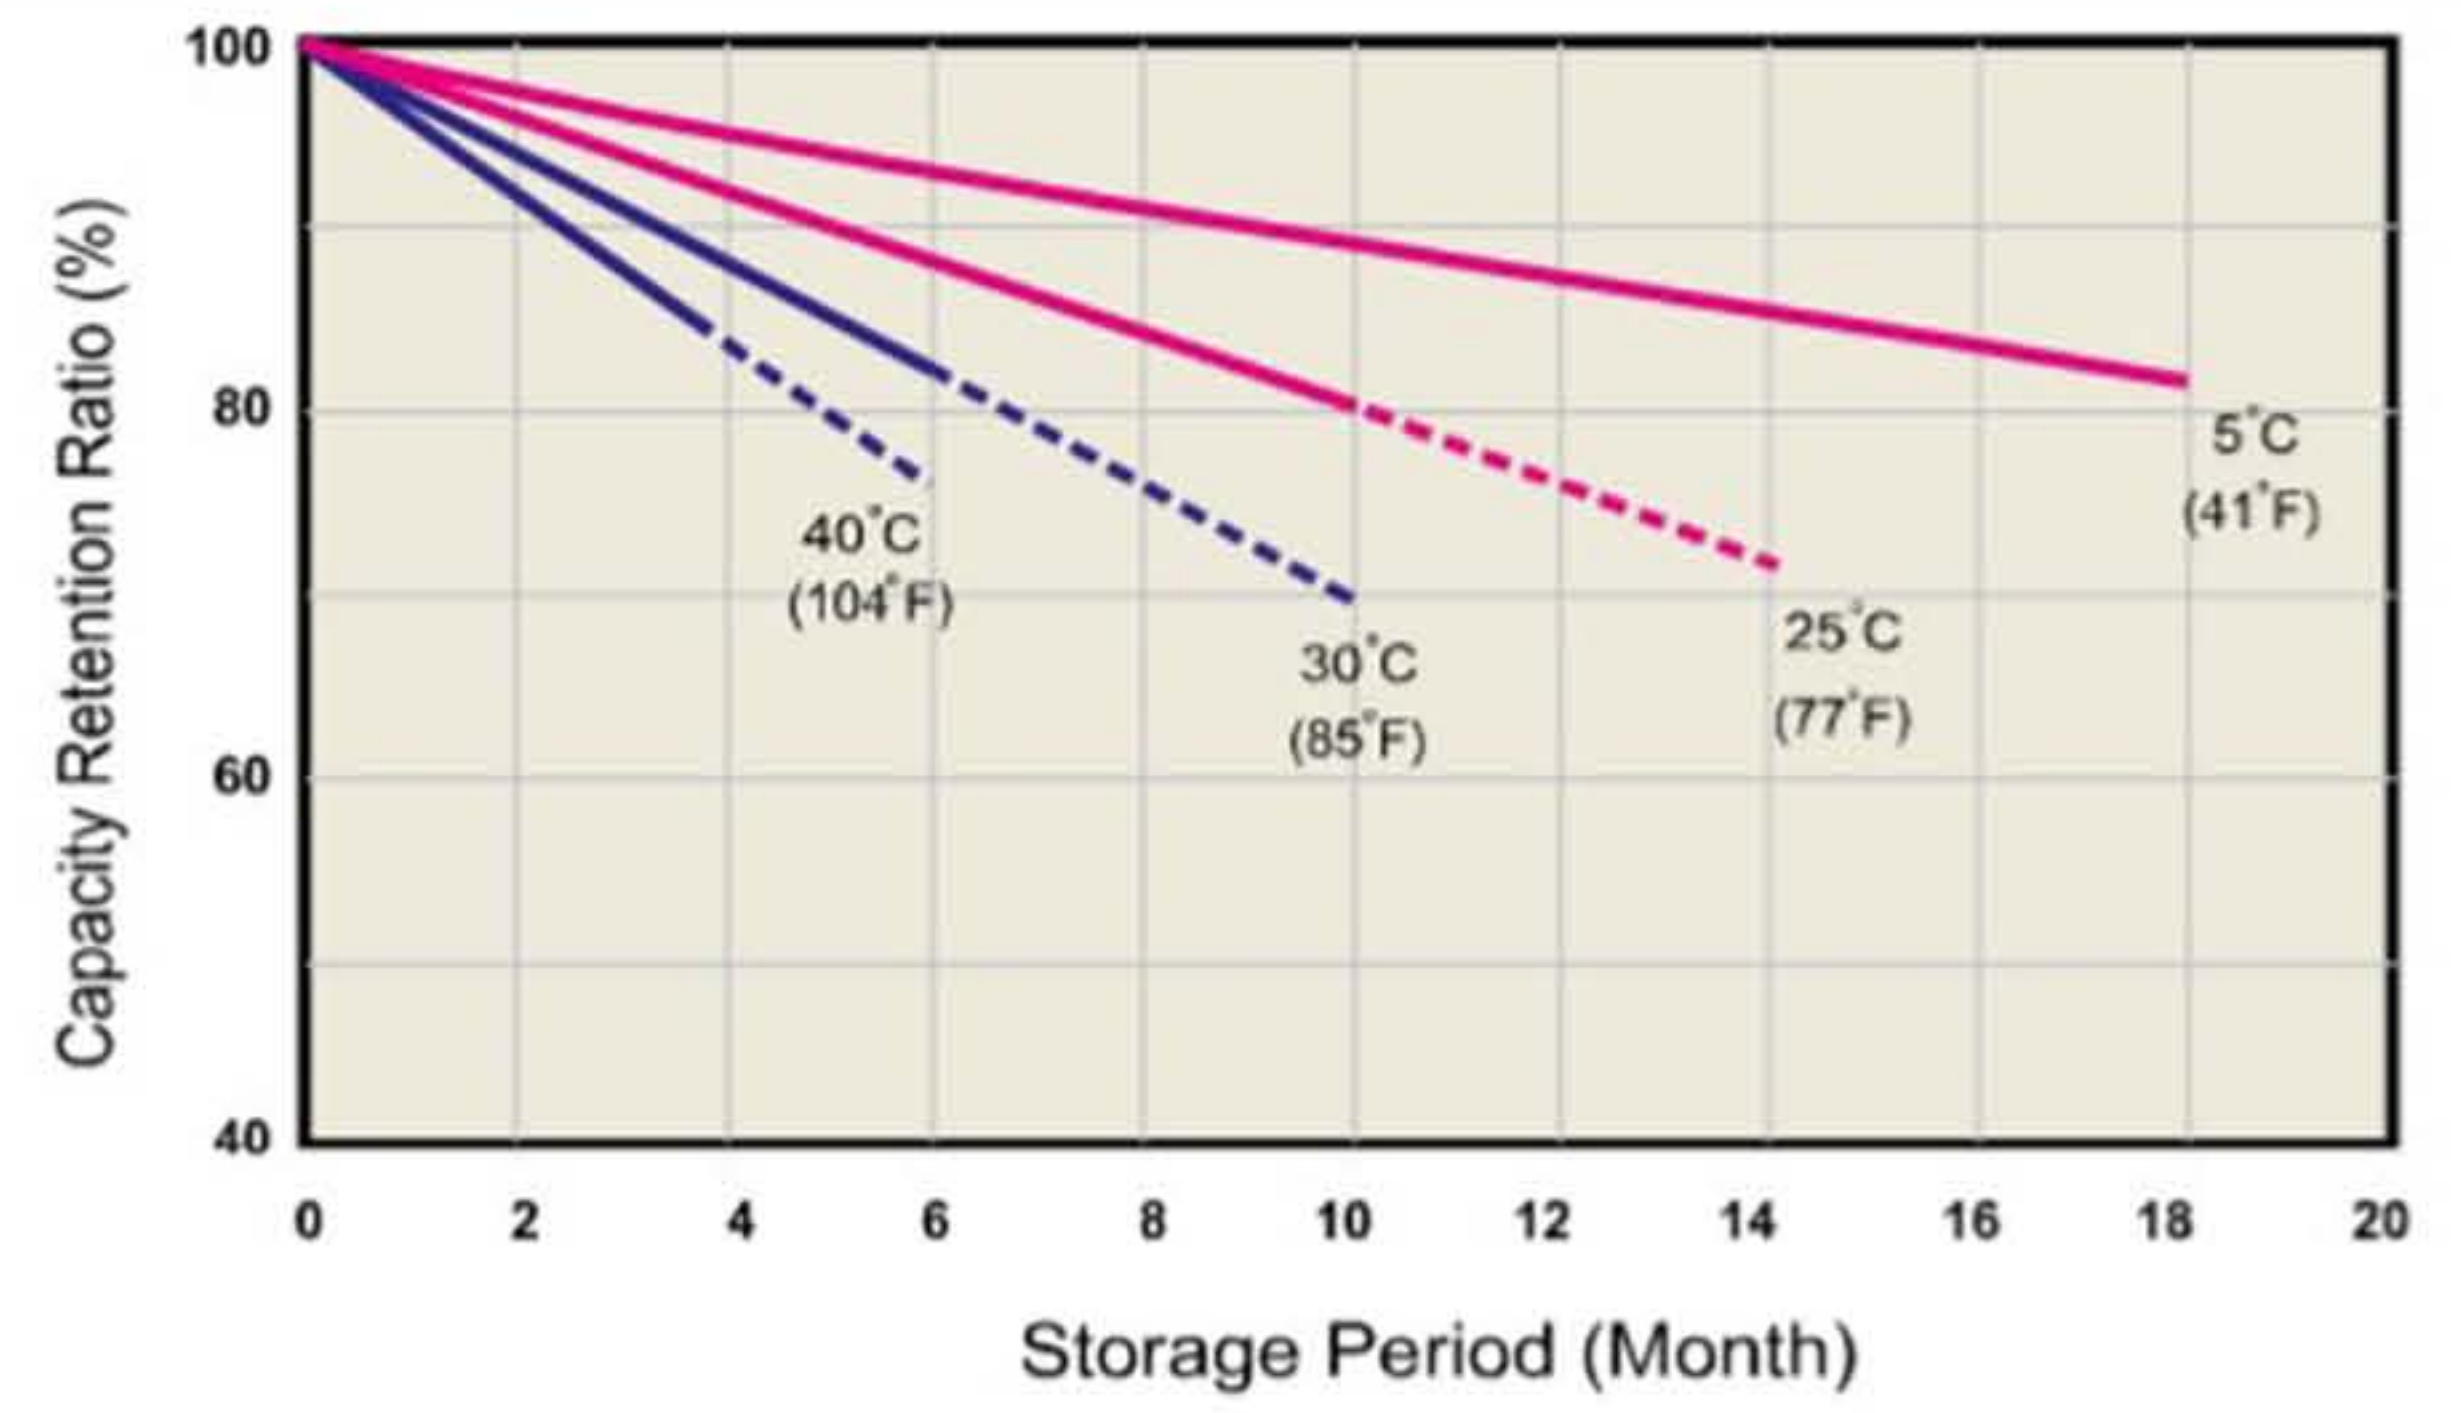


نمودار منحنی شارژ در حالت آماده به کار

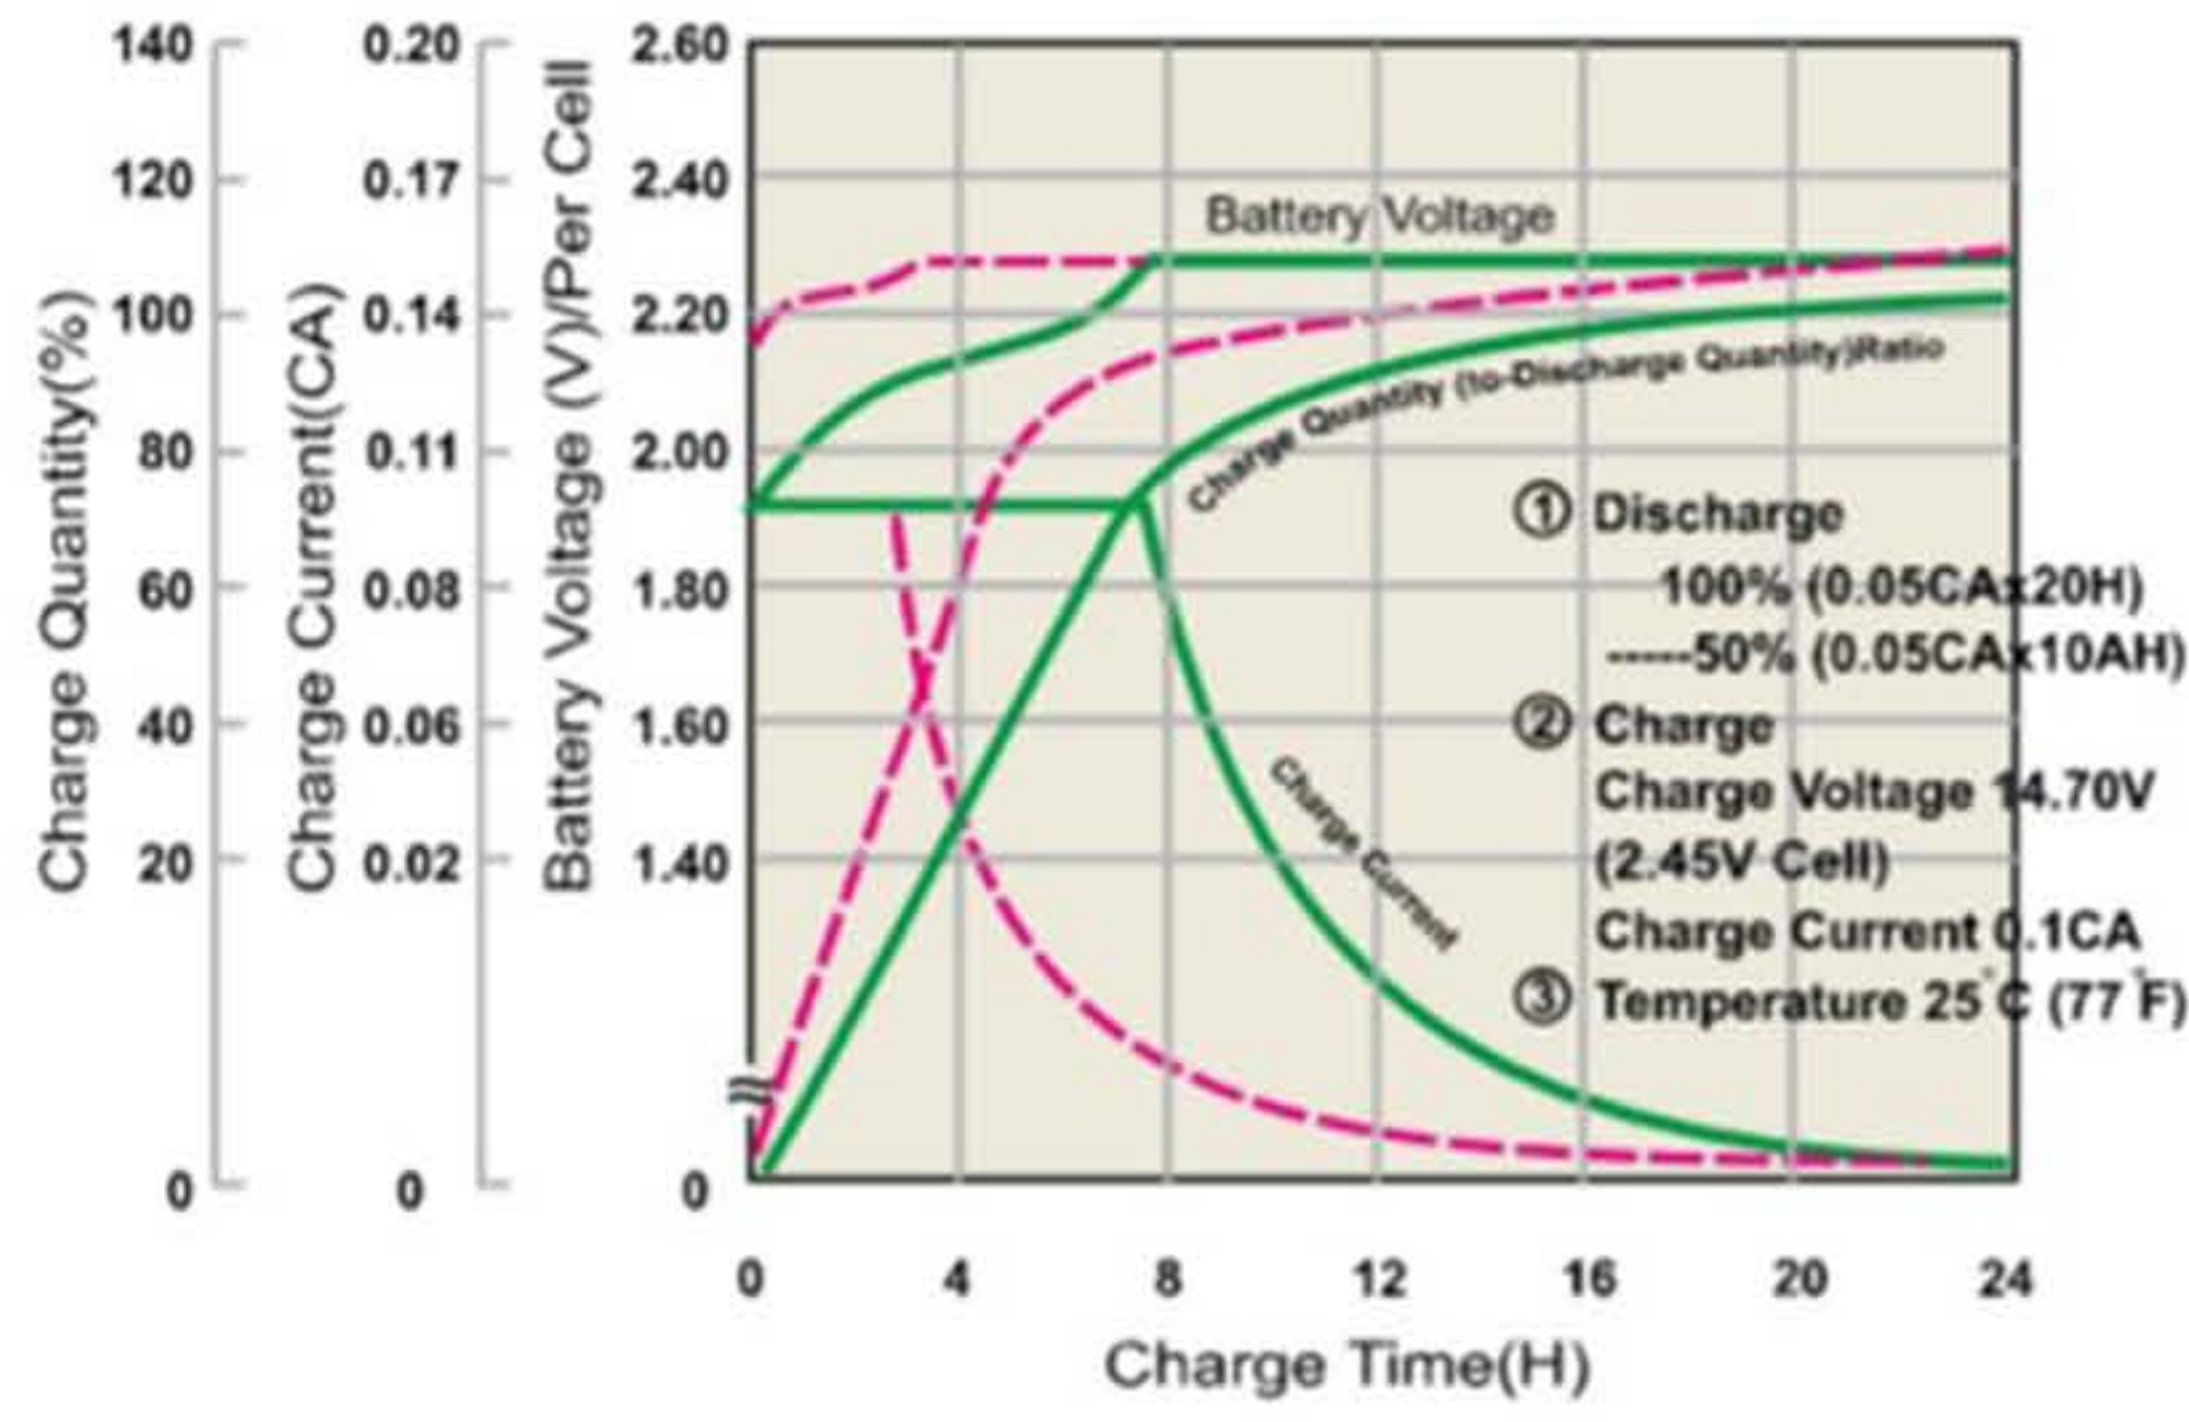


نمودار منحنی شارژ در حالت استفاده

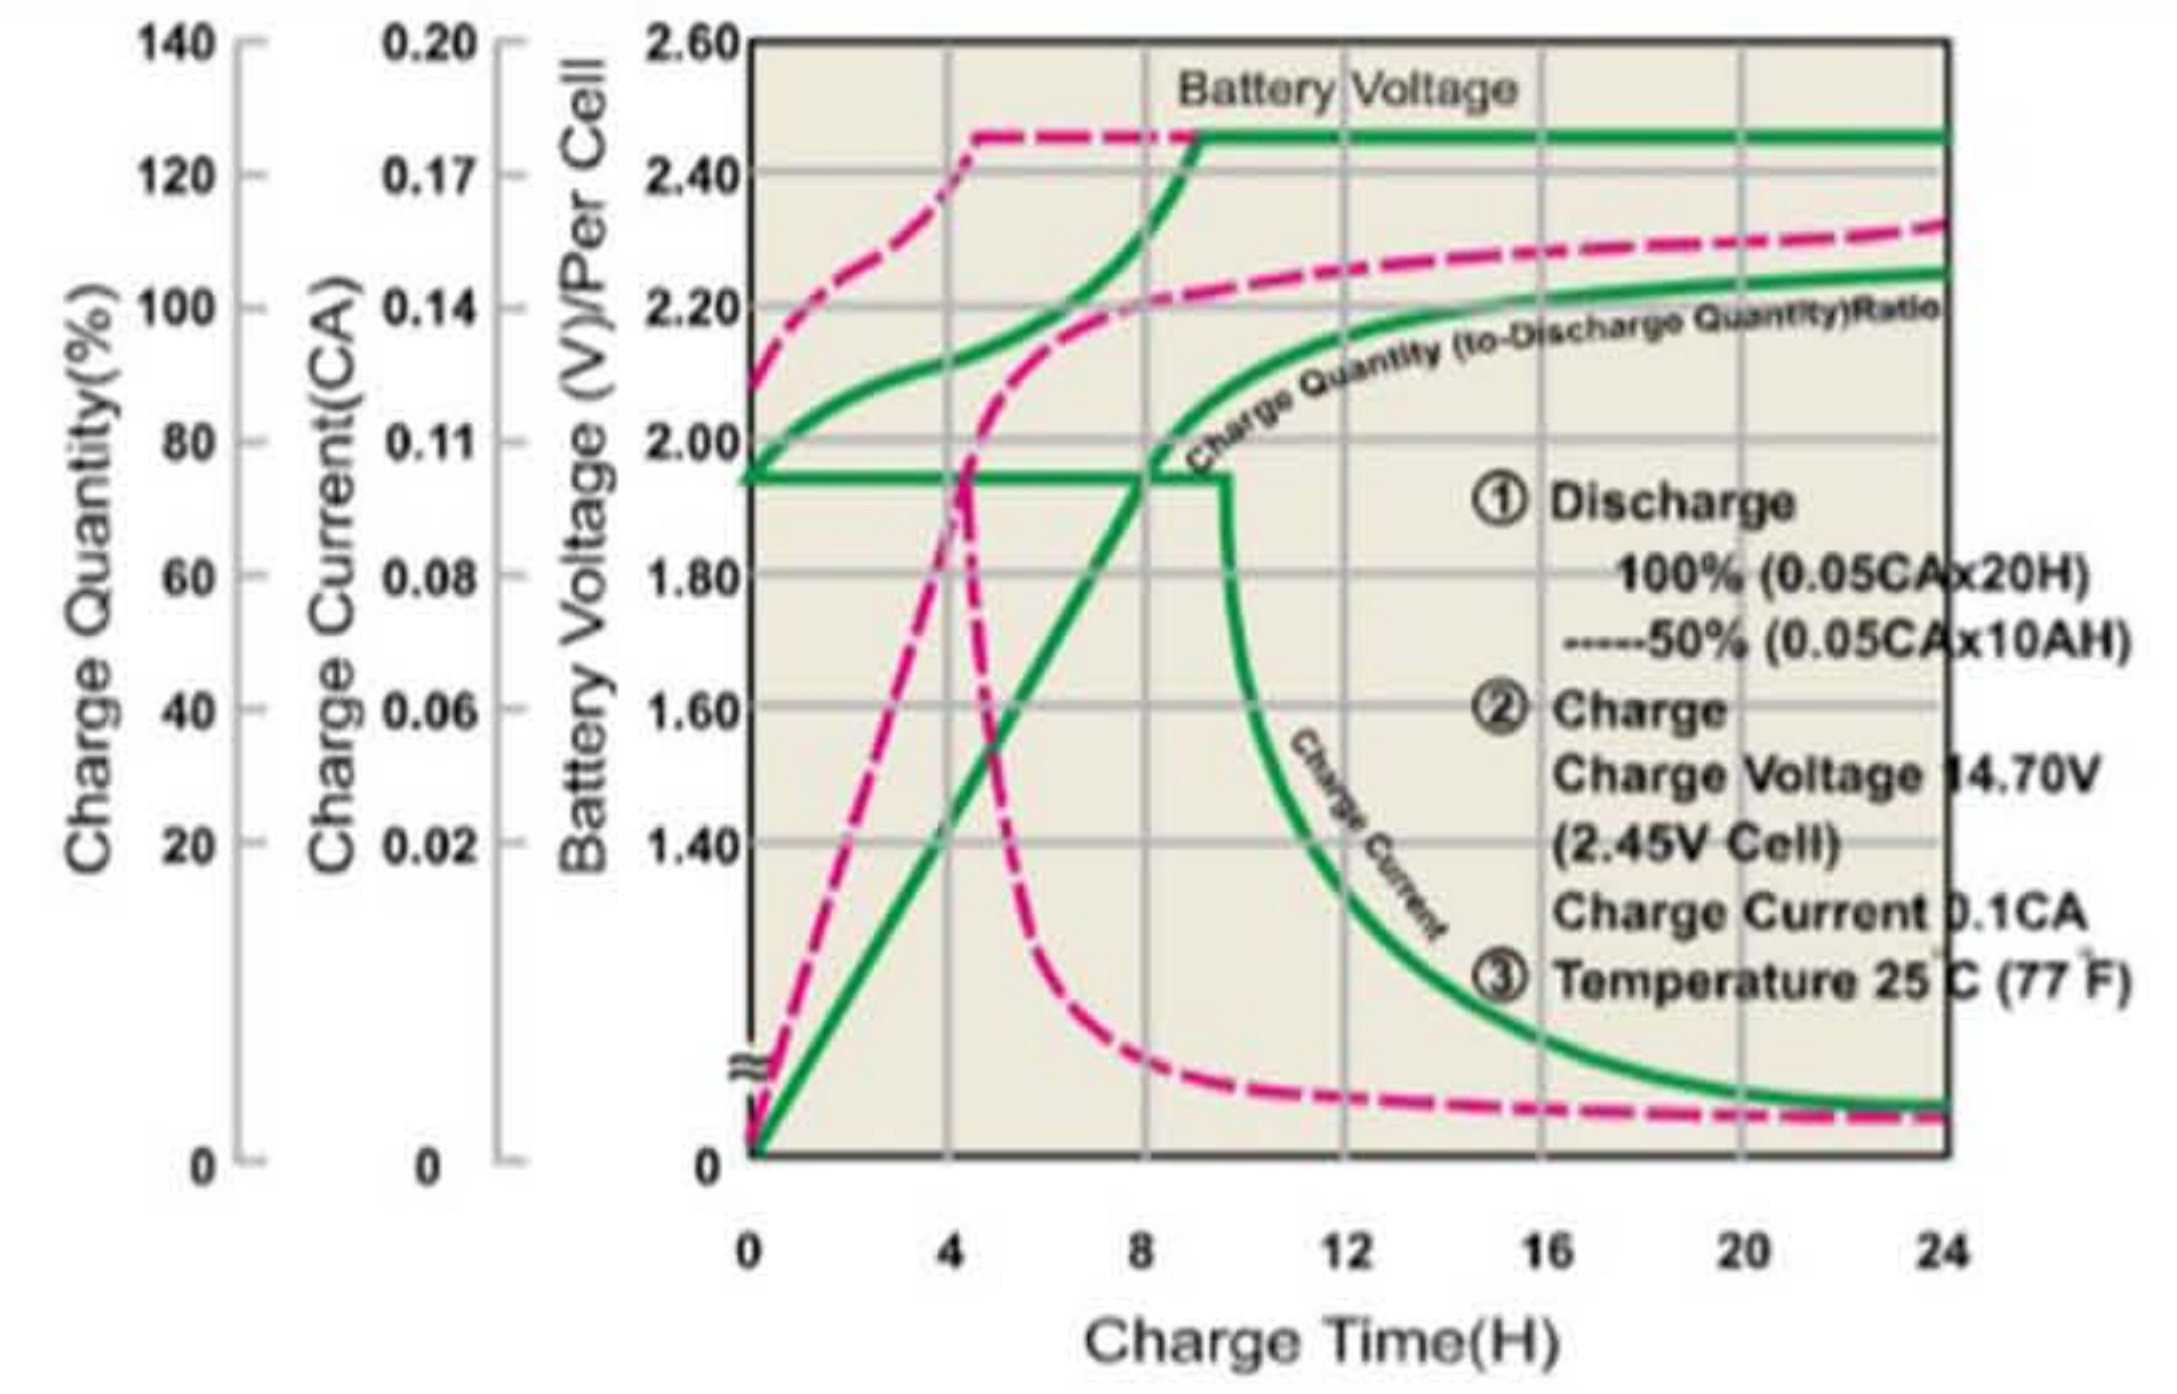

نمودار طول عمر در دمای متغیر

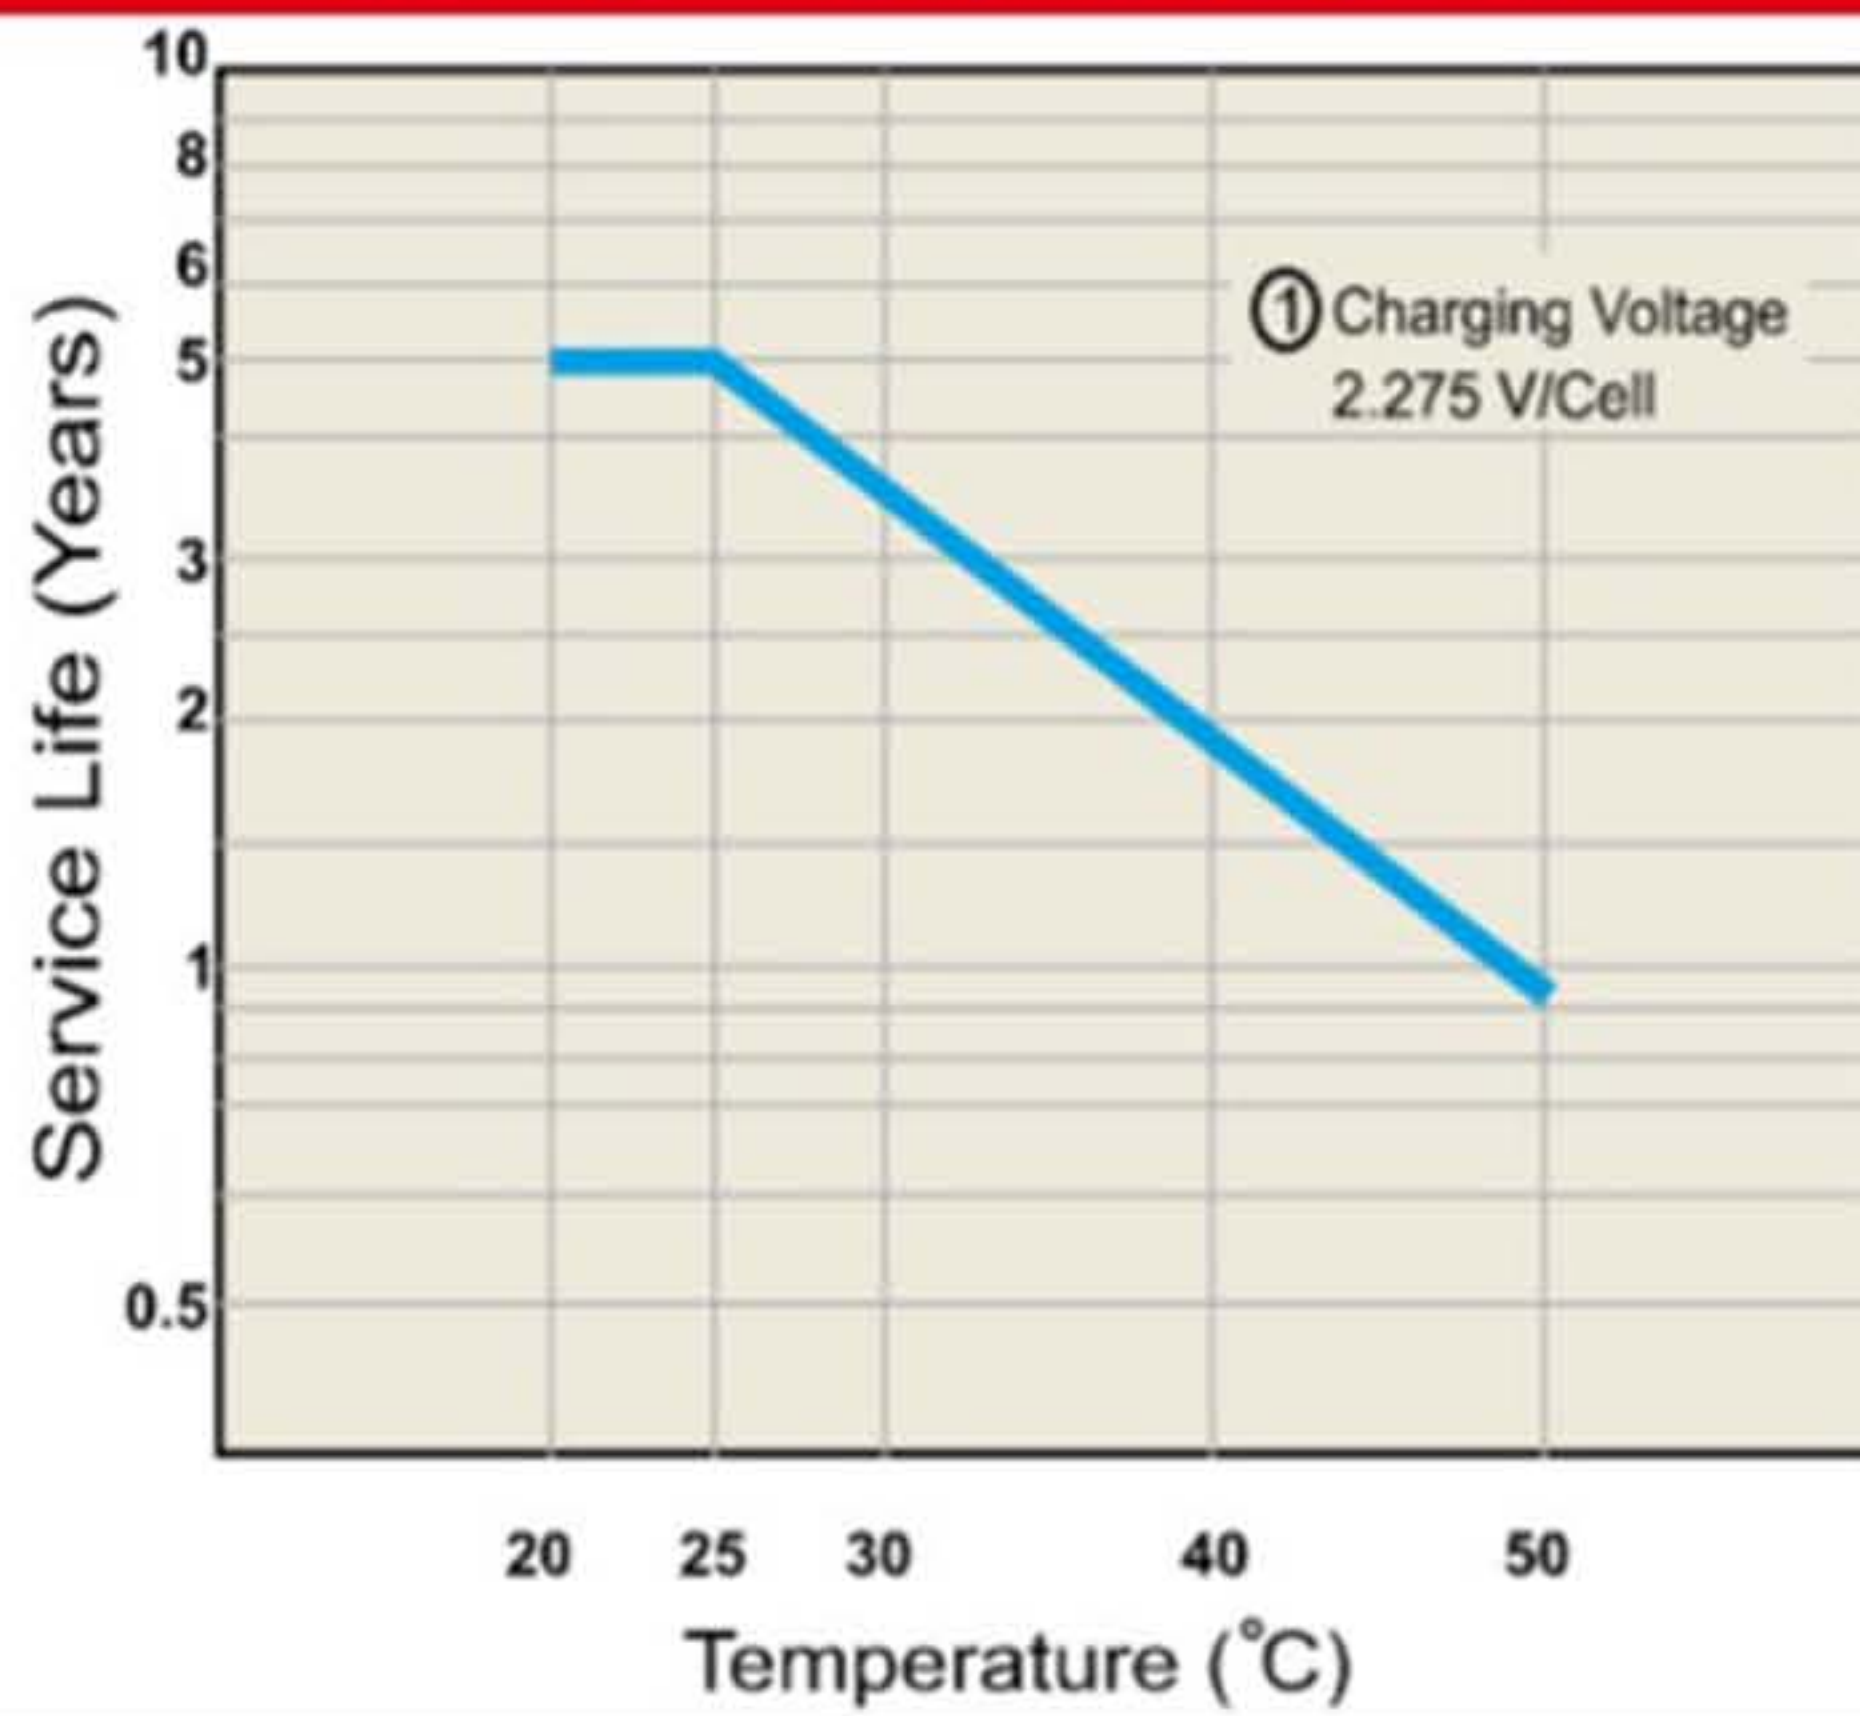

نمودار چرخه عمر نسبت به عمق دشارژ

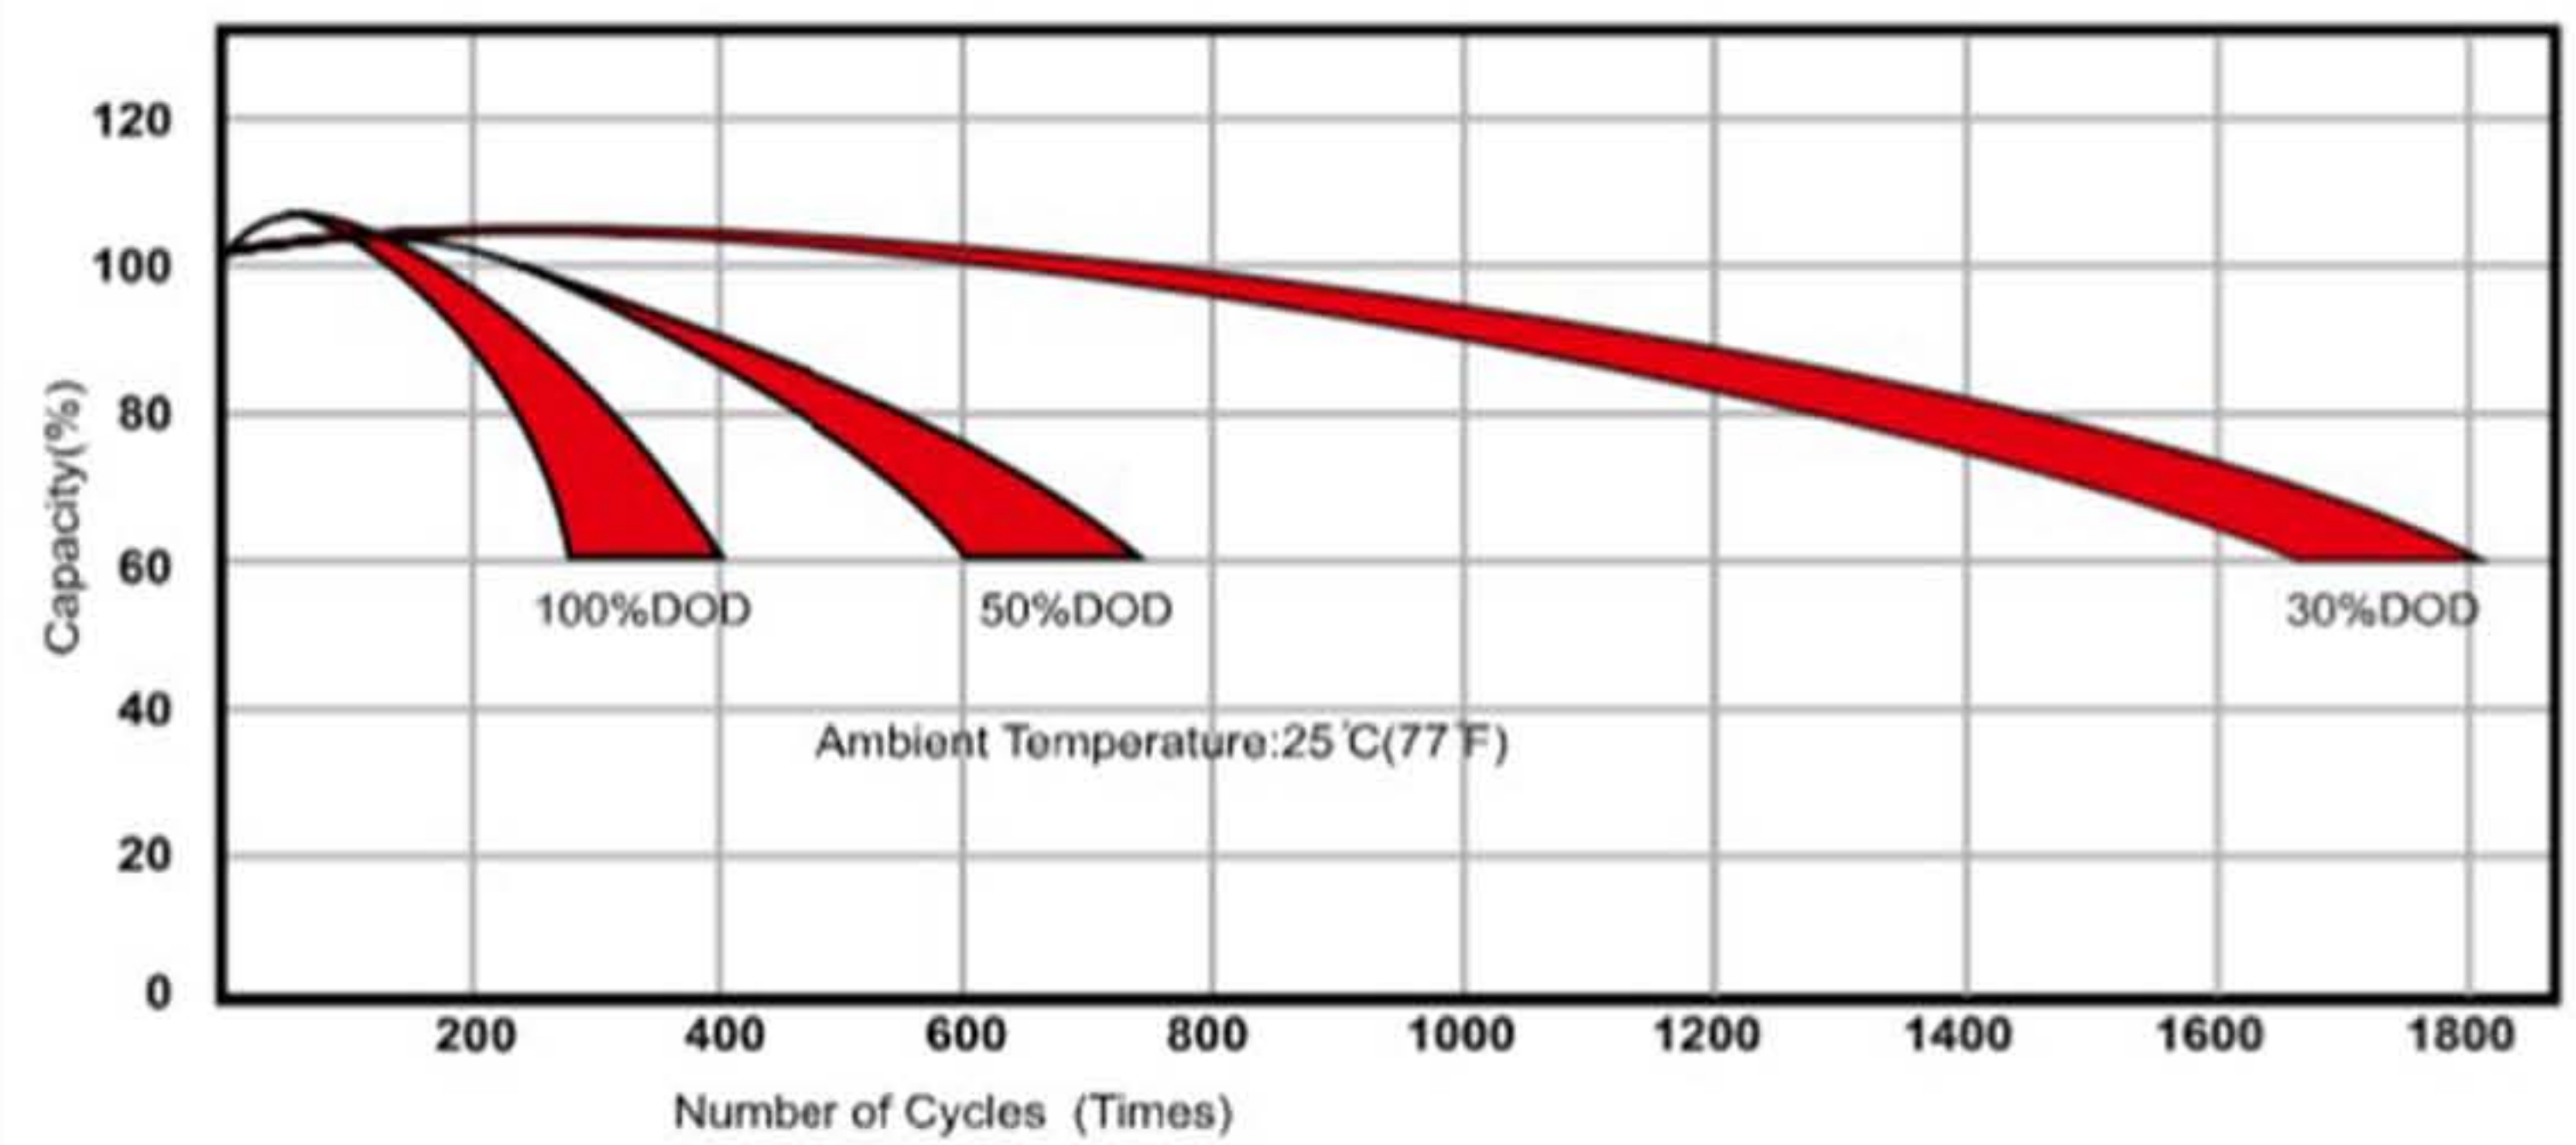

جدول جریان ثابت دشارژ در دمای ۲۵ درجه سانتیگراد

F.V/Time	5Min	10Min	15Min	30Min	45Min	1Hr	3Hr	5Hr	10Hr	20Hr
1.80V/Cell	64.49	46.40	38.92	24.61	18.54	15.61	6.29	4.28	2.31	1.19
1.75V/Cell	71.08	49.95	41.96	26.16	18.72	15.76	6.50	4.46	2.38	1.30
1.70V/Cell	78.63	54.24	43.18	26.38	19.35	15.95	6.53	4.48	2.42	1.31
1.65V/Cell	86.58	56.20	43.81	26.57	19.57	15.98	6.55	4.50	2.44	1.32
1.60V/Cell	90.28	62.05	44.77	27.05	19.80	16.17	6.62	4.54	2.46	1.34

جدول تخلیه با توان ثابت در دمای ۲۵ درجه سانتیگراد

F.V/Time	5Min	10Min	15Min	30Min	45Min	1Hr	3Hr	5Hr	10Hr	20Hr
1.80V/Cell	111.89	87.02	69.41	45.58	35.93	30.04	12.50	8.30	4.65	2.34
1.75V/Cell	123.95	93.24	73.56	46.10	36.96	30.82	12.76	8.37	4.72	2.57
1.70V/Cell	133.64	99.46	78.74	48.69	37.30	31.08	12.95	8.48	4.80	2.60
1.65V/Cell	142.89	101.94	80.29	49.73	38.33	31.75	13.02	8.56	4.87	2.64
1.60V/Cell	148.74	102.56	80.81	51.28	38.67	31.86	13.21	8.67	4.91	2.64

